

**29** Kg/24h

Distributori di ghiaccio / Ice Dispenser:  
DX35 - TD130


**DX 35**  
230V/1N/50Hz  
Ice Cube



## CARATTERISTICHE

- Produzione di singoli cubetti Gourmet pieni, puri e cristallini.
- Sistema di distribuzione ghiaccio con bottone a pressione: i cubetti cadono direttamente nel bicchiere del cliente senza manipolazioni.
- Finiture esterne in acciaio. · Controlli elettromeccanici semplici ed affidabili.
- Filtro condensatore accessibile frontalmente, facilmente rimovibile e lavabile.

## TIPO GHIACCIO / ICE TYPE



PCS / CYCLE  
PZ/CICLO

**24**

WEIGHT ICE  
PESO GHIACCIO

**20 g**

PRODUZIONE GHIACCIO /  
ICE PRODUCTION

**kg/24h**  
lbs/24h

## OPZIONALE

- Voltaggi speciali su richiesta

## CAPACITÀ DEPOSITO / BIN CAPACITY

**11,0 kg**                      **550 pcs**

## FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Push-button dispensing system: cubes drop directly into the consumer's glass, with no manipulation.
- Resistant stainless steel exterior. · Simple and reliable electromechanic controls.
- Front access condenser air filter, removable and washable. · Water system protected by patented anti-scale system.

## DIMENSIONI / DIMENSIONS

L x P x H (mm)



**380 x 515 x 1696**



**470 x 660 x 1710**

## VOLTAGE



**230/50/1**

## GAS



**R134a**  
**GWP=2141**

## OPTIONAL

- Special voltages, on request

## DATI TECNICI - SPECIFICATIONS



cond

comp. W

ABS. W

Fuse

Kwh/100Kg

l / h

kg

kg

DX35 A	220-240/50/1		790	400	10	46.6	2.7	51	60
DX35 W	220-240/50/1		1200	420	10	46.6	125	51	60

Raffreddamento ad Aria  
Air Cooled Unit



Temp. Aria Air Temp.	Temp. Acqua / Water Temp.			
	32° 90°	21° 70°	15° 60°	10° 50°
10° 50°	<b>21</b> 46	<b>25</b> 55	<b>27</b> 60	<b>29</b> 64
21° 70°	<b>19</b> 42	<b>23</b> 51	<b>25</b> 55	<b>27</b> 60
32° 90°	<b>15</b> 33	<b>15</b> 33	<b>15</b> 33	<b>15</b> 33
38° 100°	<b>12</b> 26	<b>12</b> 26	<b>12</b> 26	<b>12</b> 26

Raffreddamento ad Acqua  
WaterCooled Unit



Temp. Aria Air Temp.	Temp. Acqua / Water Temp.			
	32° 90°	21° 70°	15° 60°	10° 50°
10° 50°	<b>24</b> 53	<b>27</b> 60	<b>29</b> 64	<b>30</b> 66
21° 70°	<b>22</b> 49	<b>25</b> 55	<b>26</b> 57	<b>28</b> 62
32° 90°	<b>20</b> 44	<b>21</b> 46	<b>22</b> 49	<b>22</b> 49
38° 100°	<b>19</b> 42	<b>20</b> 44	<b>20</b> 44	<b>21</b> 46

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.  
+39 0423.738452 Fax +39 0423.722811  
email: info@castelmac.it  
www.castelmac.eu - www.icematic.eu


 **29** Kg/24h

Distributori di ghiaccio / Ice Dispenser:  
DX35 - TD130

DX 35

230V/1N/50Hz  
Ice Cube

## DIMENSIONI - DIMENSIONS

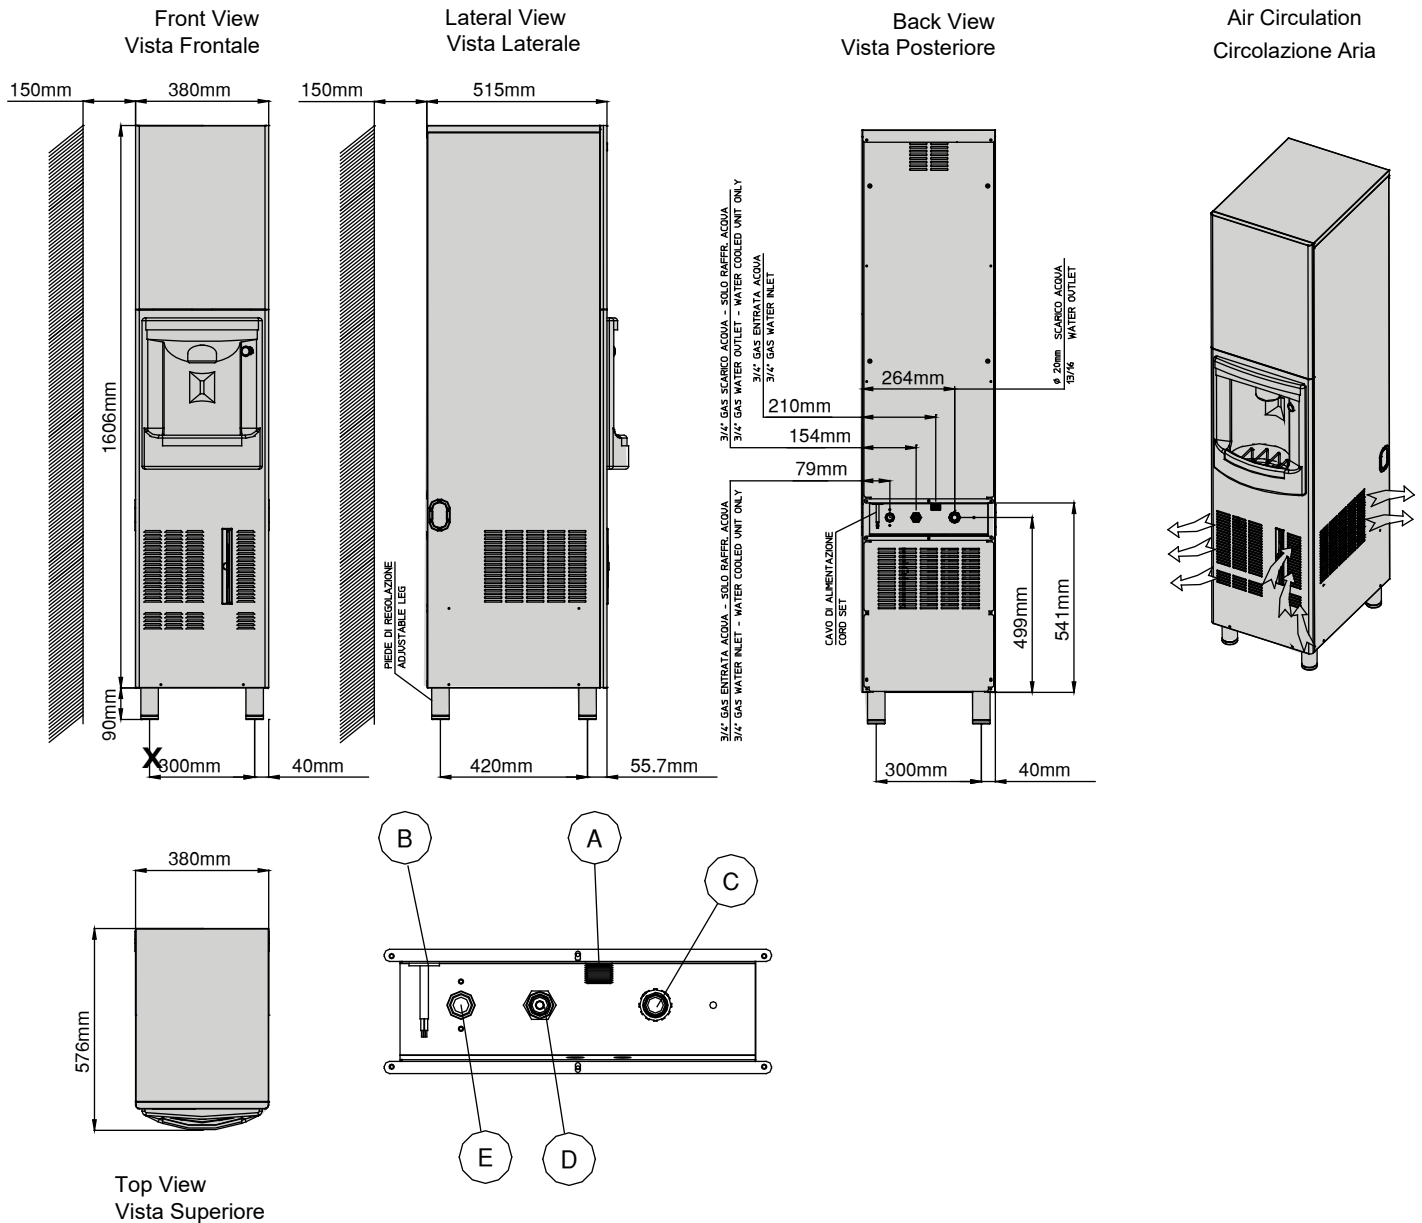

- A** Water inlet connection water condensation  
Entrata acqua condensatore ad acqua -  
3/4"gas OPTIONAL
- B** Electrical cable supply /Ingresso alimentazione  
elettrica
- C** Water outlet connection / Attacco scarico acqua Ø  
20 mm
- D** Water outlet connection water condensation / Uscita  
acqua condensatore ad acqua - 3/4" gas
- E** Water inlet connection / Attacco entrata acqua - 3/4" gas

### Condizioni operative - Operating requirements

	Min.	Max
Temp. Ambiente / Air Temperature	10°C	35°C
Temp. Acqua / Water Temperature	5°C	30°C
Press. Acqua / Water Pressure	1 bar (14psi)	5 bar (70psi)
Conducibilità acqua / Water conductivity	30 µS	500 µS
Alimentazione / Electrical supply	-10%	+10%